

## **OIV-MA-AS2-07B Chromatic characteristics**

### **Type IV method**

#### **1. Definitions**

The "chromatic characteristics" of a wine are its luminosity and chromaticity. Luminosity depends on transmittance and varies inversely with the intensity of color of the wine. Chromaticity depends on dominant wavelength (distinguishing the shade) and purity.

Conventionally, and for the sake of convenience, the chromatic characteristics of red and rosé wines are described by the intensity of color and shade, in keeping with the procedure adopted as the working method.

#### **2. Principle of the methods**

(applicable to red and rosé wines)

A spectrophotometric method whereby chromatic characteristics are expressed conventionally, as given below:

- The intensity of color is given by the sum of absorbencies (or optical densities) using a 1 cm optical path and radiations of wavelengths 420, 520 and 620 nm.
- The shade is expressed as the ratio of absorbance at 420 nm to absorbance at 520 nm.

#### **3. Method**

##### *3.1. Apparatus*

3.1.1. Spectrophotometer enabling measurements to be made between 300 and 700 nm.

3.1.2. Glass cells (matched pairs) with optical path  $b$  equal to 0.1, 0.2, 0.5, 1 and 2 cm.

##### *3.2. Preparation of the sample*

If the wine is cloudy, clarify it by centrifugation; young or sparkling wines must have the bulk of their carbon dioxide removed by agitation under vacuum.

##### *3.3. Method*

The optical path  $b$  of the glass cell used must be chosen so that the measured absorbance  $A$ , falls between 0.3 and 0.7.

Take the spectrophotometric measurements using distilled water as the reference liquid, in a cell of the same optical path  $b$ , in order to set the zero on the absorbance

# COMPENDIUM OF INTERNATIONAL METHODS OF WINE AND MUST ANALYSIS

## Chromatic Characteristics (Type-IV)

scale of the apparatus at the wavelengths of 420, 520 and 620 nm.

Using the appropriate optical path  $b$ , read off the absorbencies at each of these three wavelengths for the wine.

### 3.4. Calculations

Calculate the absorbencies for a 1 cm optical path for the three wavelengths by dividing the absorbencies found ( $A_{420}$ ,  $A_{520}$  and  $A_{620}$ ) by  $b$ , in cm.

### 3.5. Expression of Results

The color intensity  $I$  is conventionally given by:

$$I = A_{420} + A_{520} + A_{620}$$

and is expressed to three decimal places.

The shade  $N$  is conventionally given by:

$$N = \frac{A_{420}}{A_{520}}$$

and is expressed to three decimal places.

Table 1

Converting absorbance into transmittance (T%)

*Method:* find the first decimal figure of the absorbance value in the lefthand column (0-9) and the second decimal figure in the top row (0-9).

Take the figure at the intersection of column and row: to find the transmittance, divide the figure by 10 if absorbance is less than 1, by 100 if between 1 and 2 and by 1000 if between 2 and 3.

*Note:* The figure in the top right hand corner of each box enables the third decimal figure of the absorbance to be determined by interpolation.

	0	1	2	3	4	5	6	7	8	9
0	23 1000	22 977	22 955	21 933	21 912	20 891	20 871	19 851	19 932	19 813
1	18 794	18 776	17 759	17 741	16 724	16 708	16 692	15 676	15 661	15 646
	14	14	14	14	13	13	13	12	12	12

# COMPENDIUM OF INTERNATIONAL METHODS OF WINE AND MUST ANALYSIS

## Chromatic Characteristics (Type-IV)

2	631	617	603	589	575	562	549	537	525	513
	11	11	11	11	10	9	9	10	10	9
3	501	490	479	468	457	447	436	427	417	407
	9	9	9	8	8	8	8		7	8
4	398	389	380	371	363	355	347	339	331	324
	7		7	7	6	7	6	6	6	6
5	316	309 71	302	295	288	282	275	269	263	257
	6	5	6	5	5	5	5	5	5	5
6	251	245	240	234	229	224	219	214	209	204
	4	5	4	4	4		4	4	4	4
7	199	195	190	186	182	178	174	170	166	162
	3	4	3	4	4	3	3	3	3	3
8	158	155	151	148	144	141	138	135	132	129
	3	3	3	2	3	2	3	2	3	2
9	126	123	120	117	115	112	110	107	105	102

*Example:*

Absorbance            0.47                    1.47                    2.47                    3.47

T%                    33.9%                    3.4%                    0.3%                    0%

Transmittance (T%) is expressed to the nearest 0.1%.

## Chromatic Characteristics (Type-IV)

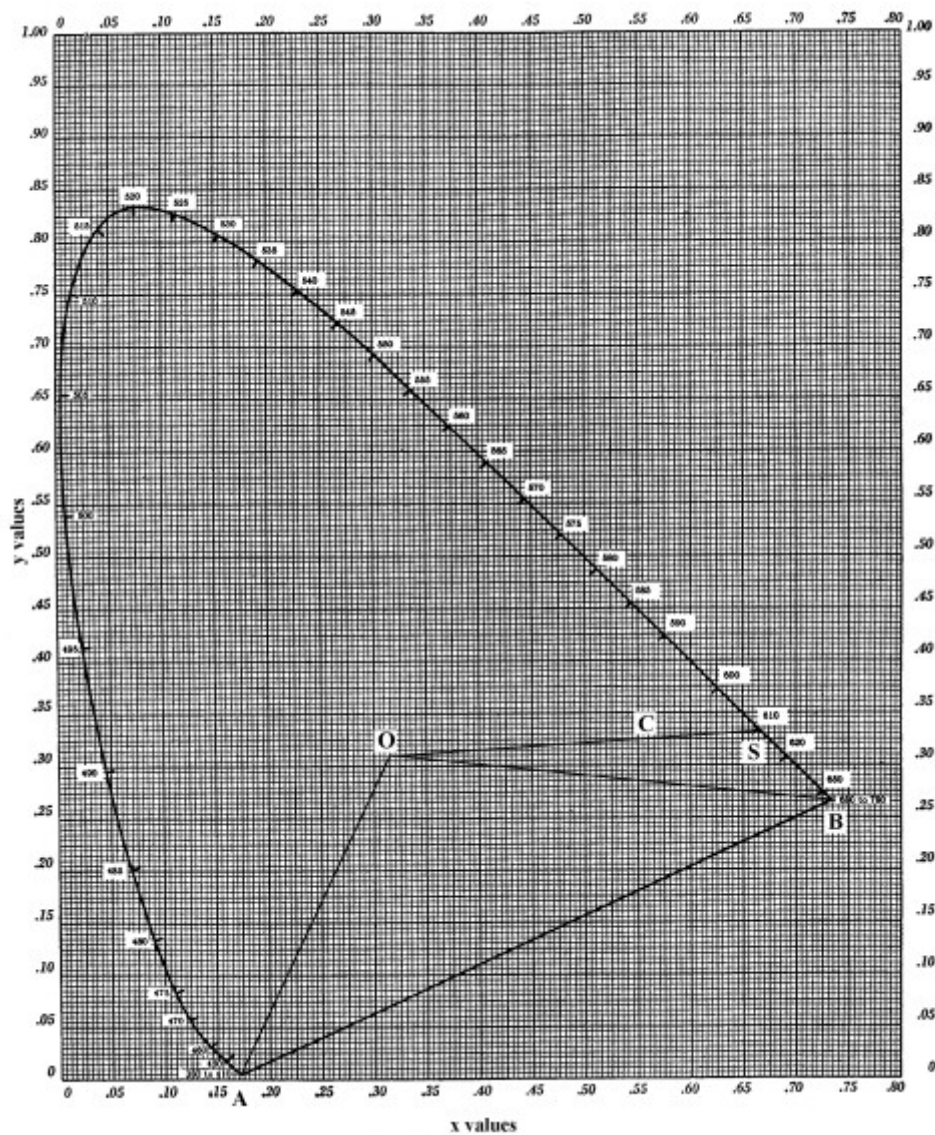


Figure 1: Chromaticity diagram, showing the locus of all colors of the spectrum

## Chromatic Characteristics (Type-IV)

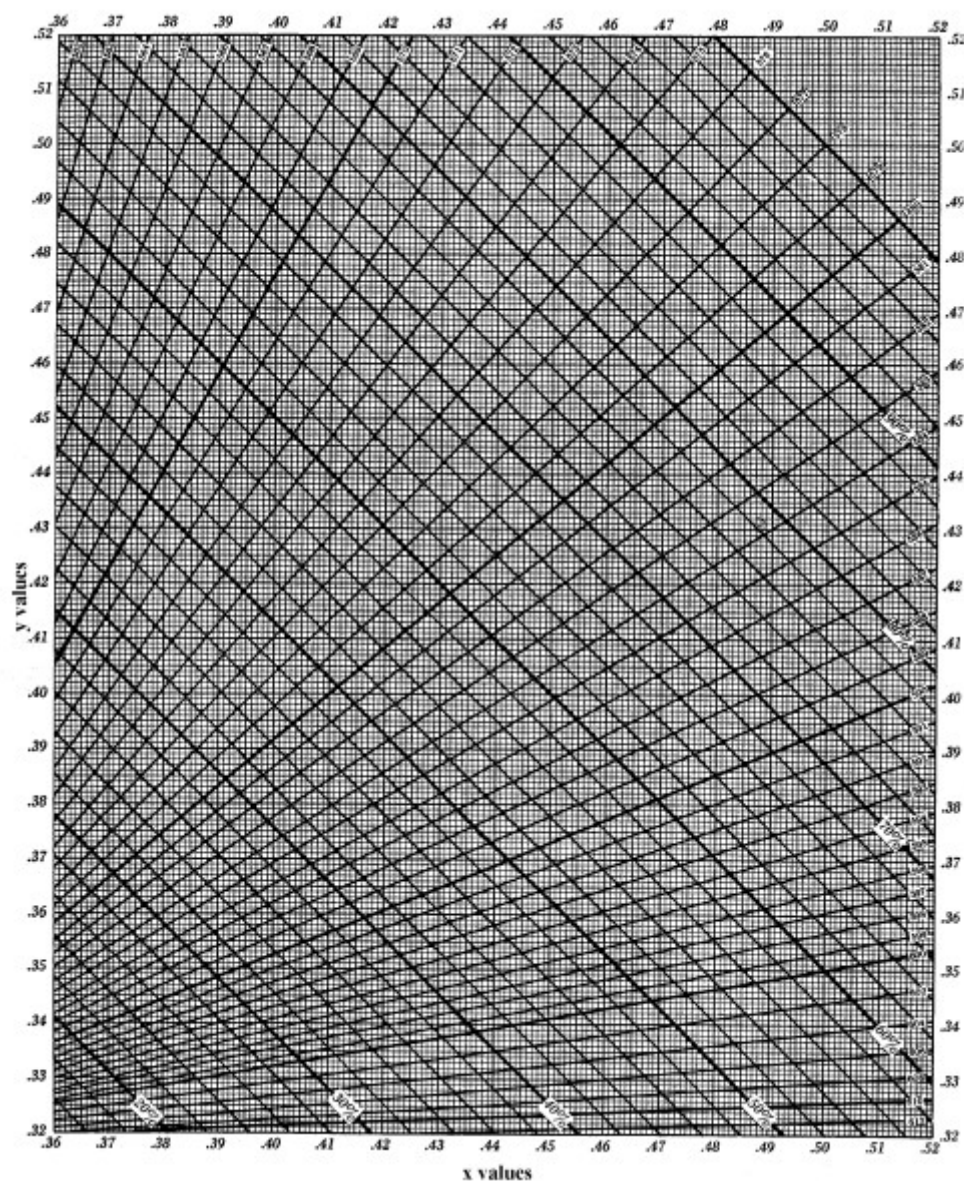


Figure 2: Chromaticity diagram for pure red wines and brick red wines

Chromatic Characteristics (Type-IV)

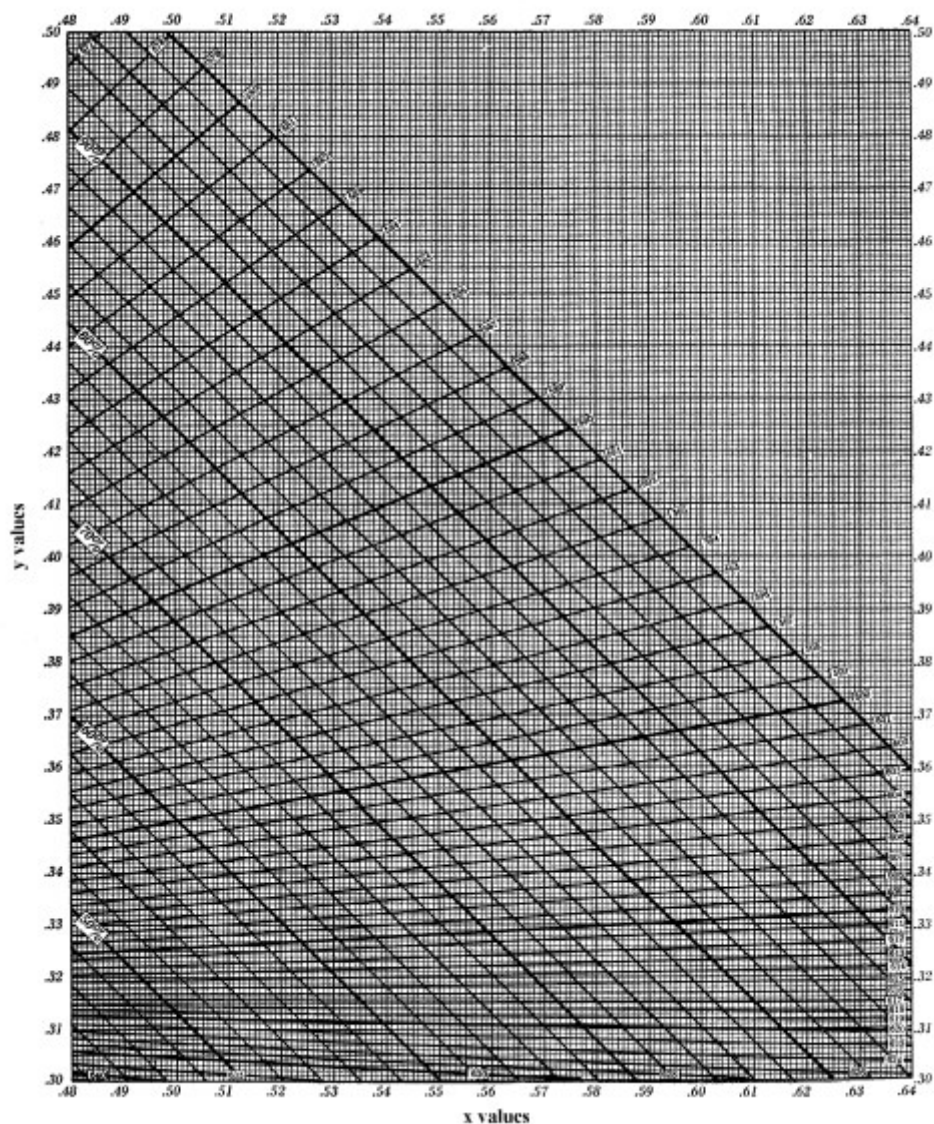


Figure 3: Chromaticity diagram for pure red wines and brick red wine

Chromatic Characteristics (Type-IV)

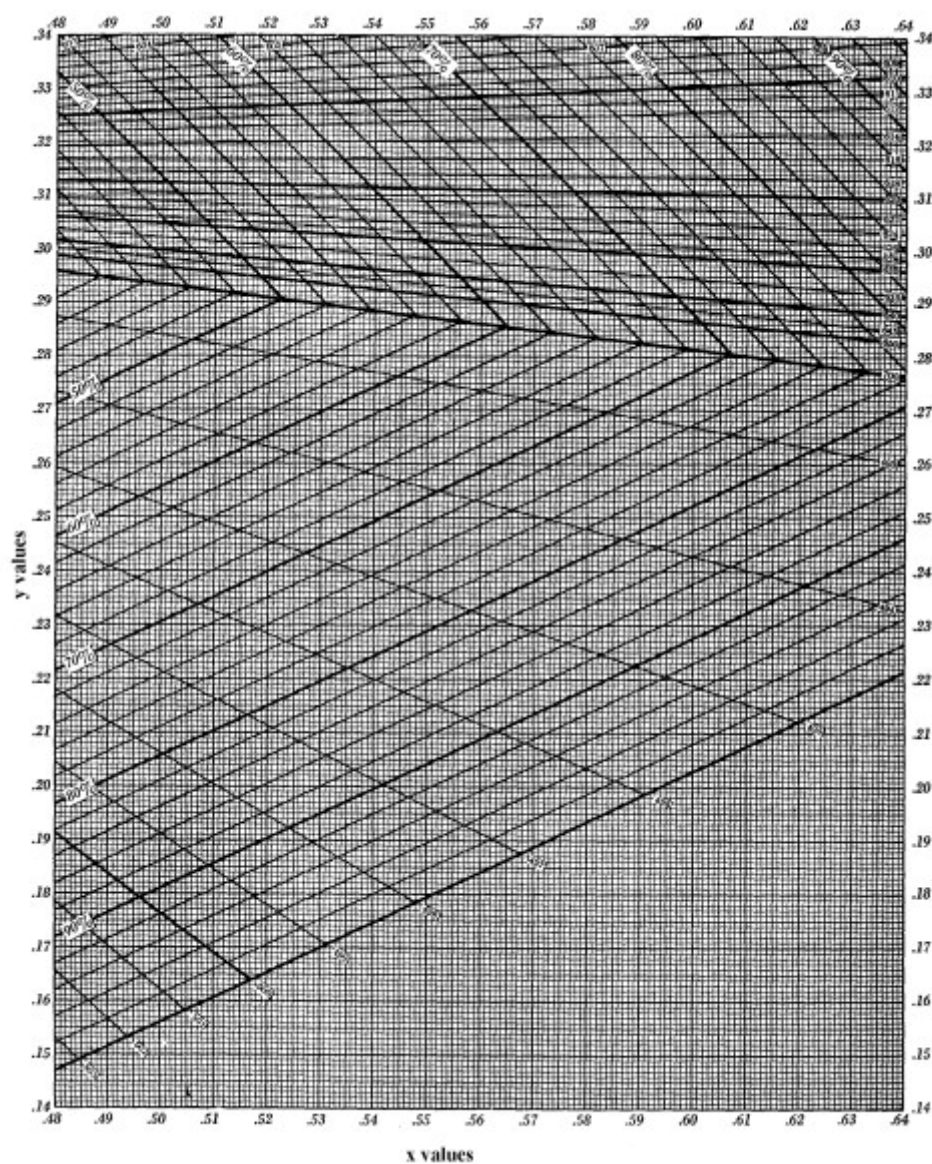


Figure 4:Chromaticity diagram for pure red wines and purple wines



Chromatic Characteristics (Type-IV)

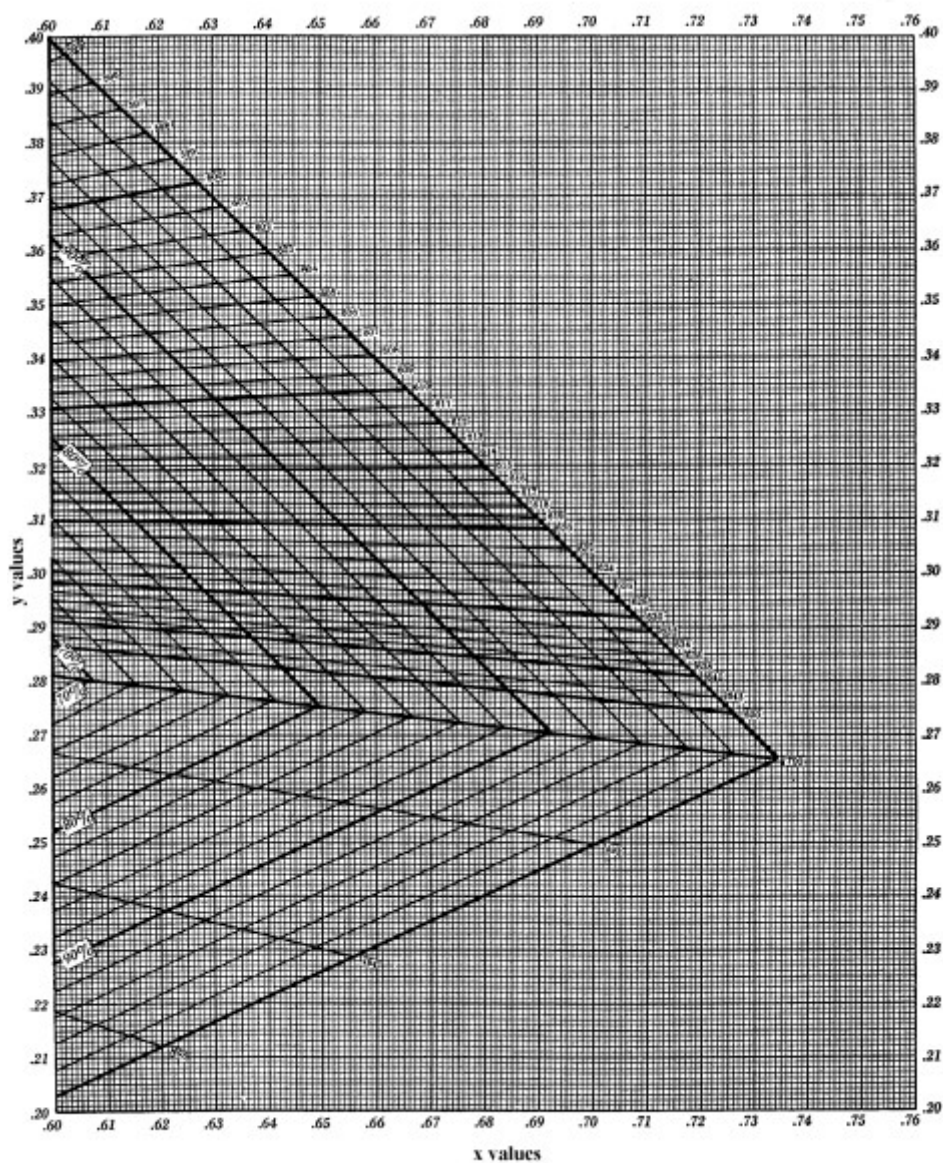


Figure 5:Chromaticity diagram for pure red wines and purple red wines



# Chromatic Characteristics (Type-IV)

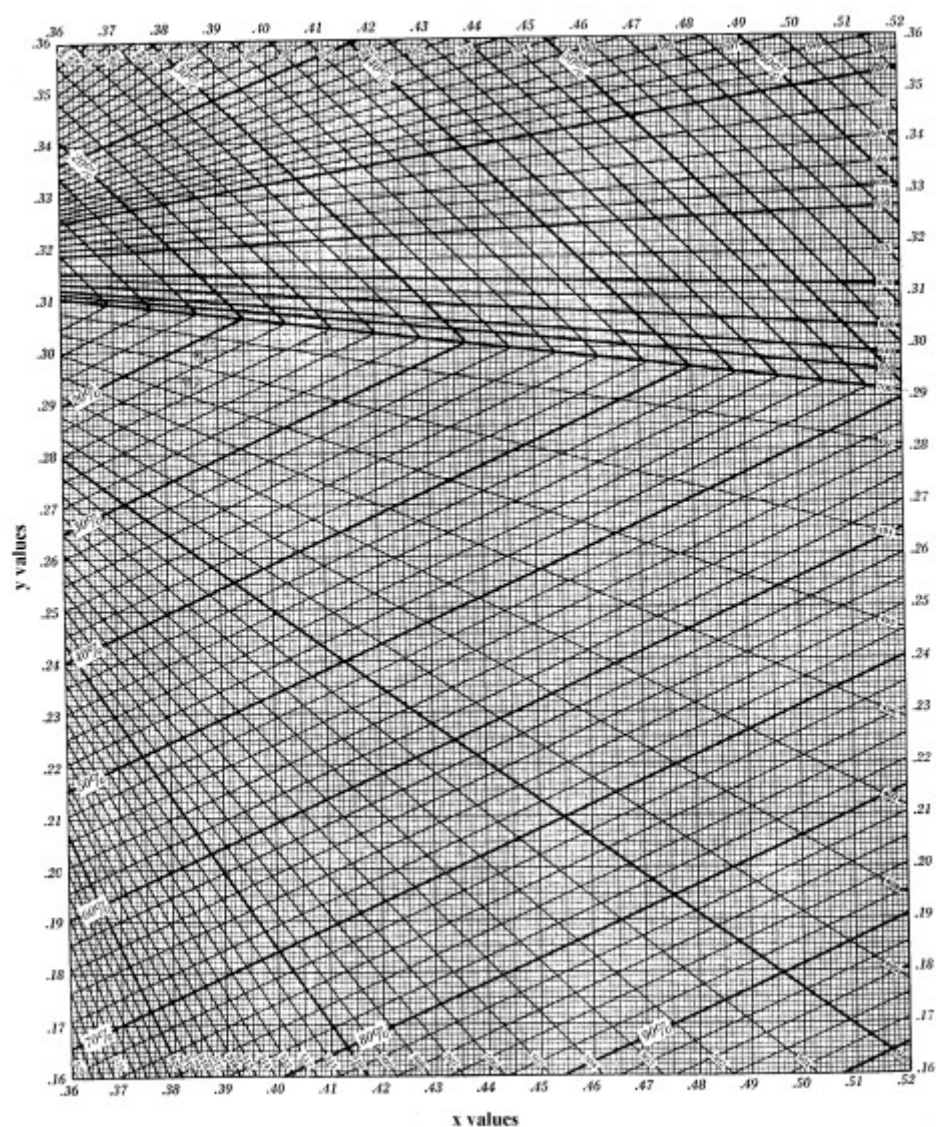


Figure 6: Chromaticity diagram for brick red wines and purple red wines

## Bibliography:

- BOUTARIC A., FERRE L., ROY M., *Ann. Fals. Fraudes*, 1937, 30, 196.
- SUDRAUD P., *Ann. Technol. Agric.*, 1958, no 2, 203.
- MARECA CORTES J., *Atti Acc. Vite Vino*, 1964, 16.
- GLORIES Y., *Conn. vigne et Vin*, 1984, 18, no 3, 195.

**Annex: Operative instructions for the determination of Chromatic Characteristics of wines and/or musts obtained by grape varieties characterized by high concentrations of colouring pigments and/or high sulfur dioxide levels**

### **1. Principle of the method**

#### **1.1. Field of application**

Applicable to red wine with high concentrations of colouring pigments, must, and must with high sulphur dioxide levels.

A spectrophotometric method whereby chromatic characteristics are expressed, conventionally, as given below:

- The intensity of colour is given by the sum of absorbencies (or O.D. = Optical Densities) using a 1 cm optical path and radiation of wavelengths 420, 520 and 620 nm.
- The shade is expressed as the ratio of absorbance at 420 nm to absorbance at 520 nm.

For grape varieties characterized by high concentrations of colouring pigments, given the nature of the chemical structure of these substances, the determination of the chromatic characteristics requires the dilution of the sample with a buffered solvent at pH 3.2. The use of a buffered solvent compared to dilution with water reduces the effect of the matrix and normalizes the O.D as the dilution increases.

### **2. Method**

#### **2.1. Apparatus**

2.1.1. Spectrophotometer enabling measurements to be made between 300 and 700 nm.

2.1.2. Glass cuvettes or single use plastic cuvettes with optical path equal to 1 cm.

2.1.3. Volumetric glassware with variable volume according to needs

2.1.4. Syringe filter 0.45 µm

#### **2.2. Reagents**

2.2.1. Type II water for analytical use, ISO 3696 standard, or of equivalent purity

2.2.2. Tartaric acid 99.5% (CAS 87-69-4)

2.2.3. Sodium hydroxide NaOH 1 N (CAS 1310-73-2)

2.2.4. Hydrogen peroxide 30% w/w (CAS 7722-84-1)

2.3. Working solutions

2.3.1. Buffer at pH 3.20

Daily preparation: weigh 7 0.1 g of tartaric acid (2.2.2) in a 1000 mL volumetric flask, add 35 ml of NaOH 1 N (2.2.3) and make up to 1000 mL with water (2.2.1). Check the pH with a pH meter and verify that pH is 3.20±0.05. The solution should be checked and filtered (2.1.4) at the time of use.

2.3.2. Hydrogen peroxide 3% (v/v)

Dilute 1.0 mL of hydrogen peroxide (2.2.4) to 10 ml. The solution should be prepared at the time of use.

2.4. Preparation of the sample

If the sample is cloudy, clarify it by centrifugation (10 min, 1146 rcf); If there is carbon dioxide remove it by agitation under vacuum (or similar systems).

In the case of grape must whose alcoholic fermentation is inhibited by adding sulphur dioxide, add 0.1 mL of 3% hydrogen peroxide solution (2.3.2) per mL of sample used and make up to volume, depending on the dilution chosen, with the buffer solution at pH 3.2 (2.3.1). Wait 20 minutes, then proceed with spectrophotometric reading.

2.5. Spectrophotometric reading for wine and must with high colour intensity or high sulphur dioxide levels

Take the spectrophotometric measurements of the samples: the absorbance (A) will fall between 0.3 and 1.0 (the absorbance acceptability range can be extended if instrumental technology allows it) If the A-value is above the maximum limit, make an appropriate number of dilutions (d) of the sample using the buffer solution (2.3.1) to meet the acceptability criteria.

Take the spectrophotometric measurements using the buffer solution as the reference liquid to set the absorbance scale of the apparatus to zero at the wavelengths of 420, 520 and 620 nm.

2.6. Calculations

Calculate the optical densities (O.D.) for each of the three wavelengths by multiplying the detected absorbances (A<sub>420</sub>, A<sub>520</sub> and A<sub>620</sub>) by the number of dilutions made (d):

$$DO_{420\text{ nm}} = A_{420} \times d$$

$$DO_{520\text{ nm}} = A_{520} \times d$$

$$DO_{620\text{ nm}} = A_{620} \times d$$

### 2.7. Expression of results

The colour intensity (I) is conventionally given by:

$$I = A_{420} + A_{520} + A_{620}$$

and is expressed to three decimal places.

The shade (N) is conventionally given by:

$$N = A_{420}/A_{520}$$

and is expressed to three decimal places.