

## **OIV-MA-AS314-03 Determination of the carbon isotope ratio $^{13}\text{C}/^{12}\text{C}$ of $\text{CO}_2$ in sparkling wines – Method using isotope ratio mass spectrometry (IRMS)**

### Type II method

#### Foreword

The following standard method has been prepared with the agreement of all the laboratories participating in the OIV Collaborative study:  $^{13}\text{C}$ -IRMS analyses of  $\text{CO}_2$  in sparkling wine (2003-2004).

#### Introduction

The headspace in a bottle of sparkling wines contains a  $\text{CO}_2$ -rich gaseous phase in equilibrium with the  $\text{CO}_2$  dissolved in the liquid phase. This gas evolves during the second fermentation, induced by the addition of sugar from grape, beet, sugar cane or maize. However, the  $\text{CO}_2$  content of sparkling wines may also be increased artificially with industrial  $\text{CO}_2$ .

In 1997, an off-line method for the determination of the  $^{13}\text{C}/^{12}\text{C}$  isotopic ratio of  $\text{CO}_2$  from sparkling wines by isotope mass spectrometry (IRMS) was presented to the OIV. This method led on to new procedures based on automated on-line techniques, developed in some European laboratories. One of these procedures was presented to the OIV in 2001. Technical progress in the next few years may well lead to new procedures for determining reliably and rapidly the  $^{13}\text{C}/^{12}\text{C}$  isotopic ratio of numerous samples of  $\text{CO}_2$ . An exhaustive description of all applicable procedures for different techniques runs the risk of the method being rapidly superseded. The following method takes this into account and describes the basic principles for the correct measurement of the carbon-13 content in  $\text{CO}_2$  from sparkling wine and includes a brief description of the procedures used nowadays and, by way of examples, some exhaustive descriptions of procedures based on off-line and on-line techniques.

### 1. Scope

This method determines by isotope mass spectrometry (IRMS) the stable carbon isotope ratio ( $^{13}\text{C}/^{12}\text{C}$ ) of  $\text{CO}_2$  in sparkling wines. The method includes a range of procedures whose use depends on the instruments available.

### 2. Normative references

# COMPENDIUM OF INTERNATIONAL METHODS OF WINE AND MUST ANALYSIS

## Determination of the carbon isotope ratio $^{13}\text{C}/^{12}\text{C}$ of $\text{CO}_2$ in sparkling wines (Type-II)

---

ISO 5725-2:1994 “Accuracy (trueness and precision) of measurement methods and results. Part 2: Basic method for the determination of repeatability and reproducibility of a standard measurement method”.

ISO 78-2:1999 “Chemistry - Layouts for standards - Part 2: Methods of chemical analysis”.

### 3. Definitions

- $^{13}\text{C}/^{12}\text{C}$ : Isotope ratio of carbon 13 to carbon 12 for a considered sample;
- $^{13}\text{C}$  Carbon 13 ( $^{13}\text{C}$ ) content expressed in parts per mill (‰);
- V-PDB: Vienna-Pee-Dee Belemnite. The PDB standard is a fossil calcium carbonate from South Carolina in USA, with an isotope ratio ( $^{13}\text{C}/^{12}\text{C}$  or  $R_{\text{PDB}}$ ) = 0.0112372. This value is the reference point for the common international PDB scale for  $^{13}\text{C}$  values expressed in parts per mill (‰).
- m/z: mass to charge relationship
- $S_r$ : Repeatability standard deviation. The standard deviation of test results obtained under repeatability conditions (conditions where independent test results are obtained with the same method on identical test samples in the same laboratory by the same operator using the same equipment within short intervals of time).
- r: Repeatability limit. Value less than or equal to which the absolute difference between two test results obtained under repeatability conditions may be expected to be with a probability of 95%;  $r=2.8 \cdot S_r$ .
- $S_R$ : Reproducibility standard deviation. The standard deviation of test results obtained under reproducibility conditions (conditions where test results are obtained with the same method on identical test samples in different laboratories with different operators using different equipment).
- R: Reproducibility limit. Value less than or equal to which the absolute difference between two test results obtained under reproducibility conditions may be expected to be with a probability of 95%;  $R=2.8 \cdot S_R$

### 4. Principle

Plants are classified as C3 and C4 depending on the route followed for sugar synthesis. The sugar from C3 plants, such as grape and beet, has lower  $^{13}\text{C}$  content than the sugar from C4 plants like cane sugar and maize. This difference is maintained in the  $^{13}\text{C}$  content of the fermentation products of sugars such as ethanol and  $\text{CO}_2$ . Moreover, the industrial  $\text{CO}_2$  used in the food industry and that comes from the combustion of fossil fuels or from the thermal treatment of carbonates has  $^{13}\text{C}$  content different from the products of C3 and C4 plants. Consequently, the  $^{13}\text{C}/^{12}\text{C}$  isotope ratio of  $\text{CO}_2$  from sparkling wine is governed by the type of sugar used in the second fermentation (C3 or C4) or by the isotopic composition of the industrial  $\text{CO}_2$  added.

The studies performed till now on the  $^{13}\text{C}$  content of  $\text{CO}_2$  from sparkling wine have shown that the  $\text{CO}_2$  obtained by fermentation of sugar from C3 plants has  $^{13}\text{C}$  in the range of -17‰ to -26‰, whereas  $\text{CO}_2$  obtained by fermentation of sugar from C4 plants has  $^{13}\text{C}$  in the range of -7‰ to -10‰. Gasified wines have their  $^{13}\text{C}/^{12}\text{C}$  isotope ratio below -29‰ or above -10‰, depending on the carbon dioxide source<sup>1-4</sup>. Therefore, the measurement of the stable carbon isotope ratio ( $^{13}\text{C}/^{12}\text{C}$ ) of  $\text{CO}_2$  from sparkling wines can be a good method for finding the origin of the gas.

$^{13}\text{C}$  content is determined from carbon dioxide gas obtained from sparkling wine. The various possible combinations of the  $^{18}\text{O}$ ,  $^{17}\text{O}$ ,  $^{16}\text{O}$  and  $^{13}\text{C}$ ,  $^{12}\text{C}$  isotopes lead to mass 44 corresponding to the  $^{12}\text{C}^{16}\text{O}_2$  isotopomer, mass 45 corresponding to  $^{13}\text{C}^{16}\text{O}_2$  and  $^{12}\text{C}^{17}\text{O}^{16}\text{O}$  species, and mass 46 for the  $^{12}\text{C}^{16}\text{O}^{18}\text{O}$  isotopomer ( $^{13}\text{C}^{17}\text{O}^{16}\text{O}$  and  $^{12}\text{C}^{17}\text{O}_2$  can be ignored due to their very low abundance). The corresponding ion currents are determined on the three different collectors. The ionic current  $m/z$  45 is corrected for the contribution of  $^{12}\text{C}^{17}\text{O}^{16}\text{O}$  which is computed from the intensity current measured for  $m/z$  46 by including the relative abundance of  $^{18}\text{O}$  and  $^{17}\text{O}$  (Craig correction). Comparison with a reference calibrated against the international standard V-PDB then allows the calculation of the  $^{13}\text{C}$  content on the  $^{13}\text{C}\%$  relative scale.

## 5. Reagents and material

The materials and consumables depend on the equipment used in the laboratory.

When the separation and purification of the  $\text{CO}_2$  samples is performed by cryotrapping in a vacuum line the following reagents are used:

- Liquid nitrogen

# COMPENDIUM OF INTERNATIONAL METHODS OF WINE AND MUST ANALYSIS

## Determination of the carbon isotope ratio $^{13}\text{C}/^{12}\text{C}$ of $\text{CO}_2$ in sparkling wines (Type-II)

---

- Ethanol
- Solid  $\text{CO}_2$

In general, the following consumables are used for the analysis with any Continuous Flow system (EA-IRMS or GC-C-IRMS). Other materials of similar quality can replace any product on this list:

- Helium for analysis (CAS 07440-59-7)
- Oxygen for analysis (CAS 07782-44-7)
- Carbon dioxide for analysis used as a secondary reference gas for carbon-13 content (CAS 00124-38-9).
- Oxidising reagent for the furnace of the combustion system, such as copper oxide for microanalysis (CAS 1317-38-0).
- Desiccant to remove water produced by combustion: for example, magnesium perchlorate for microanalyses (CAS 10034-81-4). This is not necessary when the EA-IRMS or the GC-C-IRMS systems remove water by cryotrapping.
- Capillary column and the Naphion membrane to remove water produced by combustion in GC-C-IRMS systems.

The Reference Gas used in the measurements can be a certified gas or a working reference gas calibrated compared to international references with known delta values (certified gases or reference materials). Some international reference materials that can be used for gas reference calibration and for control of the gas reference calibration are the following:

Code sample	Material	$^{13}\text{C}_{PDB}$
IMEP-8-A	$\text{CO}_2$	-6.40% from Messer Griesheim
ISO-TOP	$\text{CO}_2$	-25.7%
BCR-656	Ethanol	-20.91% from IRMM
BCR-657	Glucose	-10.76% “
SAI-692C	$\text{CO}_2$	-10.96% from Oztech trading Corporation (USA)

COMPENDIUM OF INTERNATIONAL METHODS OF WINE AND MUST ANALYSIS  
Determination of the carbon isotope ratio  $^{13}\text{C}/^{12}\text{C}$  of  $\text{CO}_2$  in sparkling wines (Type-II)

---

NBS-22	Oil	-29.7% from IAEA
IAEA-CH-6 (ANU)	Sucrose	-10.4% “
NBS-18	Calcite	-5.1% “
NBS-19	TS-limestone	+1.85% “
FID-Mix	Mixture of n-alkanes in isooctanol	From Varian
C14		-29.61%
C15		-25.51%
C16		-33.39%

## 6. Apparatus

The usual laboratory apparatus for carbon isotope ratio measurements and, in particular, the following:

- Isotopic ratio mass spectrometry (IRMS), with the ability to determine the  $^{13}\text{C}$  content of  $\text{CO}_2$  gas at natural abundance with an internal precision of 0.05 ‰ or better (expressed in relative value). The internal precision is defined here as the difference between two measurements of the same  $\text{CO}_2$  sample.

The mass spectrometer will generally be fitted with a triple collector to measure simultaneously the current intensities for  $m/z$  44, 45 and 46. The mass spectrometer should either be fitted with a dual-inlet system, for alternating measurement of the unknown sample and a standard, or use a continuous-flow technique (CF-IRMS).

- Continuous-flow systems (CF-IRMS). Continuous-flow systems with an automated gas sampling system can be used. Several commercially available CF-IRMS techniques suitable for the scope of the present method are:
  - GC-C-IRMS (Gas chromatography - combustion- IRMS)
  - EA-IRMS (Elemental analyser equipped for liquid or solid injection)

These systems separate and purify  $\text{CO}_2$  and elute the resulting carbon dioxide to the ionisation chamber of the spectrometer.

- Gas Sampler-IRMS. A peripheral system may be used for the on-line gas preparation, isolation of  $\text{CO}_2$  and introduction of  $\text{CO}_2$  into the isotope ratio mass spectrometer.
- Glass or steel vacuum line, with cryogenic traps and connected to a pump able to obtain a pressure lower than  $5.10^{-3}$  mbar.
- Gas sampling devices, commercially available (such as syringe for gas samples) or designed in-house, able to extract a  $\text{CO}_2$  aliquot from the sparkling wine without isotopic fractionation.
- Sealed vials for gas samples, adaptable on gas autosampler to the continuous-flow systems.
- Sealed vials for sparkling wine aliquots, adaptable on vacuum line and/or on gas autosampler to the continuous-flow systems.

## 7. Procedure

The proposed method includes three steps:  $\text{CO}_2$  sampling,  $\text{CO}_2$  purification and separation, and  $^{13}\text{C}/^{12}\text{C}$  ratio measurement. These steps can be totally independent (off-line system) or fully or partially connected on-line (on-line system). Any procedure that avoids isotopic fractionation of the  $\text{CO}_2$  sample during the three steps of the method may be used. Details on particular procedures based on off-line and CF systems are given in Annexes A, B and C.

The following description refers to the procedures used for the participant laboratories in the inter-laboratory test.

### 7.1. $\text{CO}_2$ sampling procedures:

- a. Sampling the  $\text{CO}_2$  at room temperature from the headspace of the bottle by plugging a special device through the cork, or
- b. Sampling the  $\text{CO}_2$  from the headspace of the bottle after removing the cork and sealing the bottle with a gas-tight precision lock connected to a sampling device. The sparkling wine bottle should be cooled to under  $0^\circ\text{C}$  before changing the locking device and then warmed to room temperature. An aliquot of gas collected in the sampling device is removed by a gas-tight syringe and injected into a sealed GC-vial, or
- c. Sampling the  $\text{CO}_2$  from an aliquot of sparkling wine. The sparkling wine bottle should be

# COMPENDIUM OF INTERNATIONAL METHODS OF WINE AND MUST ANALYSIS

## Determination of the carbon isotope ratio $^{13}\text{C}/^{12}\text{C}$ of $\text{CO}_2$ in sparkling wines (Type-II)

---

cooled to 4°-5°C before removing the cork. The wine aliquots are placed in a special bottle adaptable to a glass vacuum line or to a gas autosampler.

- d. Refrigerate the sample at 4-5 °C, before quickly transferring the liquid into a vial and sealing it with a Teflon-silicone septum cap. Then 50 µL of liquid is then transferred into a 10 mL vial and analysed. If necessary, the vial should be filled with helium in order to remove the atmospheric  $\text{CO}_2$ .
- e. After refrigerating the sample, the bottle is opened at room temperature and a sample of 200 µL of liquid is taken using a pipette and placed in suitable vials. The vials are immediately resealed then placed in an ultrasonic bath for 10 min prior to analysis.

The statistical results of the inter-laboratory test for sampling procedures 7.1.d and 7.1.e are given in ANNEX E.

### 7.2. $\text{CO}_2$ purification and separation procedures

- a. Uncondensed gases and water present in the gas sample are removed in a vacuum line by use of cryogenic traps, or
- b. Gas samples are purified and  $\text{CO}_2$  separated by different on-line systems, which are connected to the IRMS by means of continuous-flow or a cryogenic trap. Some of the on-line systems that can be used are the following:
  - a water cryogenic trap on-line with a continuous-flow system
  - a water trap (magnesium perchlorate) followed by a gas chromatograph
  - a gas chromatograph connected either directly to the IRMS or by means of a combustion interface.

### 3. $^{13}\text{C}/^{12}\text{C}$ ratio measurement:

The carbon isotope ratio of  $\text{CO}_2$  obtained from sparkling wine is measured by using an isotopic ratio mass spectrometer.

## 8. Calculation

Express the  $^{13}\text{C}/^{12}\text{C}$  isotope ratio of the  $\text{CO}_2$  from sparkling wine as the deviation from a working standard ( $^{13}\text{C}$ ) previously calibrated in relation to the international standard PDB (Pee Dee Belemnite). This parameter is defined as the relative difference per thousand between the  $^{13}\text{C}$  and  $^{12}\text{C}$  ratios of a sample in relation to the PDB

# COMPENDIUM OF INTERNATIONAL METHODS OF WINE AND MUST ANALYSIS

## Determination of the carbon isotope ratio $^{13}\text{C}/^{12}\text{C}$ of $\text{CO}_2$ in sparkling wines (Type-II)

---

Standard. The PDB standard is a fossil calcium carbonate from South Carolina in USA, with an isotope ratio ( $R_{PDB}$ ) = 0.0112372. This value is the reference point of the common international PDB scale for  $^{13}\text{C}$  values expressed in parts per mill (‰).

The  $^{13}\text{C}$  values expressed in relation to the working standard are calculated with the following equation:

$$^{13}\text{C}_{\frac{sam}{ref}}(\text{‰}) = 1000 \times (R_{sam} - R_{ref})/R_{ref}$$

where

$R_{sam}$  is the  $^{13}\text{C}/^{12}\text{C}$  isotope ratio of the test portion;

$R_{ref}$  is the  $^{13}\text{C}/^{12}\text{C}$  isotope ratio of the working standard.

The  $^{13}\text{C}$  values expressed in relation to the PDB standard are calculated using the following equation:

$$^{13}\text{C}_{sam/V-PDB}(\text{‰}) = ^{13}\text{C}_{sam/ref} + ^{13}\text{C}_{ref/V-PDB} + (^{13}\text{C}_{sam/ref} \times ^{13}\text{C}_{sam/V-PDB})/1000$$

where

$^{13}\text{C}_{ref/V-PDB}$  is the isotopic deviation of the working standard previously determined from the PDB standard expressed in parts per mill (‰).

Express the results to two decimal places.

### 9. Precision

*Details of the inter-laboratory test on precision of the method are given in annex D and E.*

#### 9.1. Repeatability

The absolute difference between two single results found on identical test sample by one operator using the same apparatus within the shortest feasible time interval will exceed the repeatability limit  $r$  in no more than 5% of the cases.

The accepted mean values of the standard deviation of repeatability ( $S_r$ ) and repeatability limit ( $r$ ) are equal to:

$$S_r = 0.21\text{‰}$$

$$r = 0.58\text{‰}$$

Characteristics of sampling procedures 7.1.a-c

$$S_r = 0.21\text{‰}$$

$$r = 0.56\text{‰}$$

Characteristics of sampling procedures 7.1d and 7.1e



# COMPENDIUM OF INTERNATIONAL METHODS OF WINE AND MUST ANALYSIS

## Determination of the carbon isotope ratio $^{13}\text{C}/^{12}\text{C}$ of $\text{CO}_2$ in sparkling wines (Type-II)

---

### 9.2. Reproducibility

The absolute difference between two single results found on identical test sample reported by two laboratories will exceed the reproducibility  $R$  in not more than 5% of the cases.

The accepted mean values of the standard deviation of reproducibility ( $S_R$ ) and reproducibility limit ( $R$ ) are equal to:

$$S_R = 0.47\text{‰}$$

$$R = 1.33\text{‰}$$

Characteristics of sampling procedures 7.1.a-c

$$S_R = 0.68\text{‰}$$

$$R = 1.91\text{‰}$$

Characteristics of sampling procedures 7.1d and 7.1e

## 10. Test report

The test report shall contain the following data:

- all the information necessary for the identification of the sample tested;
- a reference to the International Standard Method;
- the method used, including the procedure for sampling and measurement and the instrument system used;
- the results of the test and units, including the results of the individual determinations and their mean, calculated as specified in clause 8 ("Calculation");
- any deviations from the procedure specified;
- any unusual features observed during the test;
- the date of the test;
- whether repeatability has been verified;
- a description of the procedure for the reference gas calibration used to measure the test portions.

Annexes (A,B,C,D, E)

## 11. Bibliography

- *Mesure du rapport isotopique  $^{13}\text{C}/^{12}\text{C}$  du gaz carbonique des vins mousseux et des vins gazéifiés.* J. Merin and S. Mínguez. *Office International de la Vigne et du Vin. Paris. F.V. 1039, 2426/200297 (1997).*
- *Examination of the  $^{13}\text{C}/^{12}\text{C}$  isotopes in sparkling and semi-sparkling wine with the aid of simple on-line sampling.* M. Boner and H. Förstel. *Office International de la Vigne et du Vin. Paris. F.V. 1152. (2001).*
- *Use of  $^{13}\text{C}/^{12}\text{C}$  ratios for studying the origin of  $\text{CO}_2$  in sparkling wines.* J. Dunbar. *Fresenius Z. Anal. Chem., 311, 578-580 (1982).*
- *Contribution to the study of the origin of  $\text{CO}_2$  in sparkling wines by determination of the  $^{13}\text{C}/^{12}\text{C}$  isotope ratio.* I. González-Martin, C. González-Pérez, E. Marqués-Macías. *J. Agric. Food Chem. 45, 1149-1151 (1997).*
- *Protocol for Design, Conduct and Interpretation of Method-Performance studies.* *Pure Appl. Chem., 1995, 67, 331-343.*

### Annex A Experimental procedure based on off-line systems for sampling and measurement

(“in-house” sampling device, off-line vacuum line and dual-inlet IRMS)

#### 1. Material

- Sampling device. The device that will be used to extract gas aliquots from the bottle consists of a hollow punch (steel needle) with three lateral orifices through which the gas enters. It is connected to a valve system composed of two valves connected in sequence and has a capacity of about 1 mL. One valve is attached to the punch (Valve 1) and the other is attached to a steel tube (Valve 2), which connects the device to a vacuum line. For a glass vacuum line an adapter with a flexible steel tube will be necessary. Figure shows the device for gas collection.
- Off-line vacuum line with two cryogenic traps ( $P < 0.05$  mbar). Two types of vacuum line can be used, a glass or steel vacuum line.
- Dual-inlet - Isotope ratio mass spectrometer with the ability to determine the  $^{13}\text{C}$  content of  $\text{CO}_2$  gas at natural abundance with an internal precision of

# COMPENDIUM OF INTERNATIONAL METHODS OF WINE AND MUST ANALYSIS

## Determination of the carbon isotope ratio $^{13}\text{C}/^{12}\text{C}$ of $\text{CO}_2$ in sparkling wines (Type-II)

---

0.05‰ or better (expressed in relative  $\delta$  value). Internal precision is here defined as the difference between two measurements of the same  $\text{CO}_2$  sample.

### 2. Procedure (see Figure)

#### 1. $\text{CO}_2$ sampling:

1. Connect the sampling device to vacuum line and test its seal capacity.
2. Punch the sampling device with the valves closed into the bottle cork by means of a circular movement whilst maintaining the device vertical.
3. Connect the sampling device-wine bottle assembly to the vacuum line and evacuate the line and the reservoir delimited by the two valves (Valve 2 opened and Valve 1 closed).
4. Once a vacuum has been created in the reservoir, close valve 2, open valve 1 and maintain this configuration for 1 min. After the equilibration time, close valve 1. The gas retained in the reservoir is then purified.

#### 2.2. $\text{CO}_2$ purification and separation:


1. Transfer the  $\text{CO}_2$  collected in the reservoir to the first cryogenic trap by liquid nitrogen for at least 1 min, then pump the uncondensed gas until a pressure of less than 0.05 mbar is reached.
2. Transfer the  $\text{CO}_2$  sample to the measurement device by using liquid nitrogen in the second cryogenic trap and by changing the liquid nitrogen in the first cryogenic trap for a water trap at  $-80 \pm 5$  °C. Maintain this for at least 1 min.
3. Pump the uncondensed gas (until a pressure of less than 0.05 mbar is reached) before closing the measurement device.

#### 3. $^{13}\text{C}/^{12}\text{C}$ ratio measurement

The carbon isotope ratio of obtained is measured by using a dual-inlet IRMS.

### 3. Reference

- Mesure du rapport isotopique  $^{13}\text{C}/^{12}\text{C}$  du gaz carbonique des vins mousseux et des vins gazeifiés. J.Merín, S.Mínguez. Office International de la Vigne et du Vin, F.V. 1039, 2426/200297.

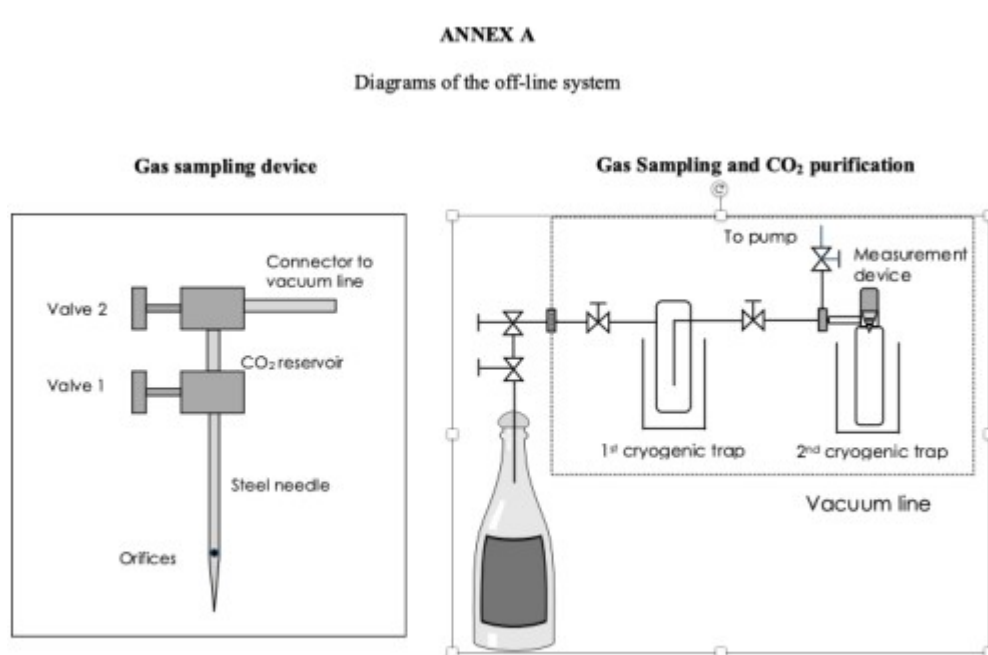

## Annex B Experimental procedure based on the on-line systems for sampling and measurement (CF-IRMS)

### 1. Sampling technique

At first the sampling system is evacuated, the carbon dioxide is extracted from the bottle using a “sampling device”, and a specific quantity is transferred to the storage vessel. After applying an overpressure, a small quantity of sample gas is introduced into the on-line helium flow with the aid of a restrictor. The sampling system is illustrated in Figure 2.

There is now a continuous carbon dioxide flow present in the helium flow (sample flow). The remaining helium flow is free from carbon dioxide and acts as the zero flow. Artificial “switching peaks” are generated by temporarily switching from the zero flow to the sample flow (switching time: 2 seconds), which are measured in the MS for their isotopic ratio.

### 2. Procedure (see Figure):

#### 2.1. Evacuation of the sampling system

The entire sampling system is evacuated to a negative pressure of 1 mbar (V3 closed)

### 2.2. Sampling

The closure is pierced with a “sampling device” and the bottle atmosphere is transferred into the gas storage vessel (GV) with the aid of the negative pressure (pressure increase to approx. after 50 mbar). The fine adjustment valve (VF) permits a controlled and slow transfer of the gas. The gas is purified in the cryotrap during transfer.

### 2.3. Feeding

After sampling (V3, V2 closed, V4 open), an overpressure of 1,5 bar is built up with the aid of helium. The gas to be measured is fed to the CF-IRMS by opening V3. The measurement can be performed after a pre-run of 150 seconds. A capillary is integrated as a restrictor which only allows the feeding of a very small carrier gas quantity (10mL/min).

### 2.4. Measurement


A carbon dioxide flow is now continuously present in the helium sample flow (PRO). Switching from the sample flow (PRO) to the pure helium flow (NUL) permits the generation of artificial switching peaks.

Switching on the sample side: 2 seconds (zero side: 10-30 seconds).

## 3. Reference

- Examination of the  $^{13}\text{C}/^{12}\text{C}$  isotopes in sparkling and semi-sparkling wine with the aid of simple on-line sampling. M. Boner and H. Förstel. Office International de la Vigne et du Vin, FV 1152.

Diagram of the on-line system

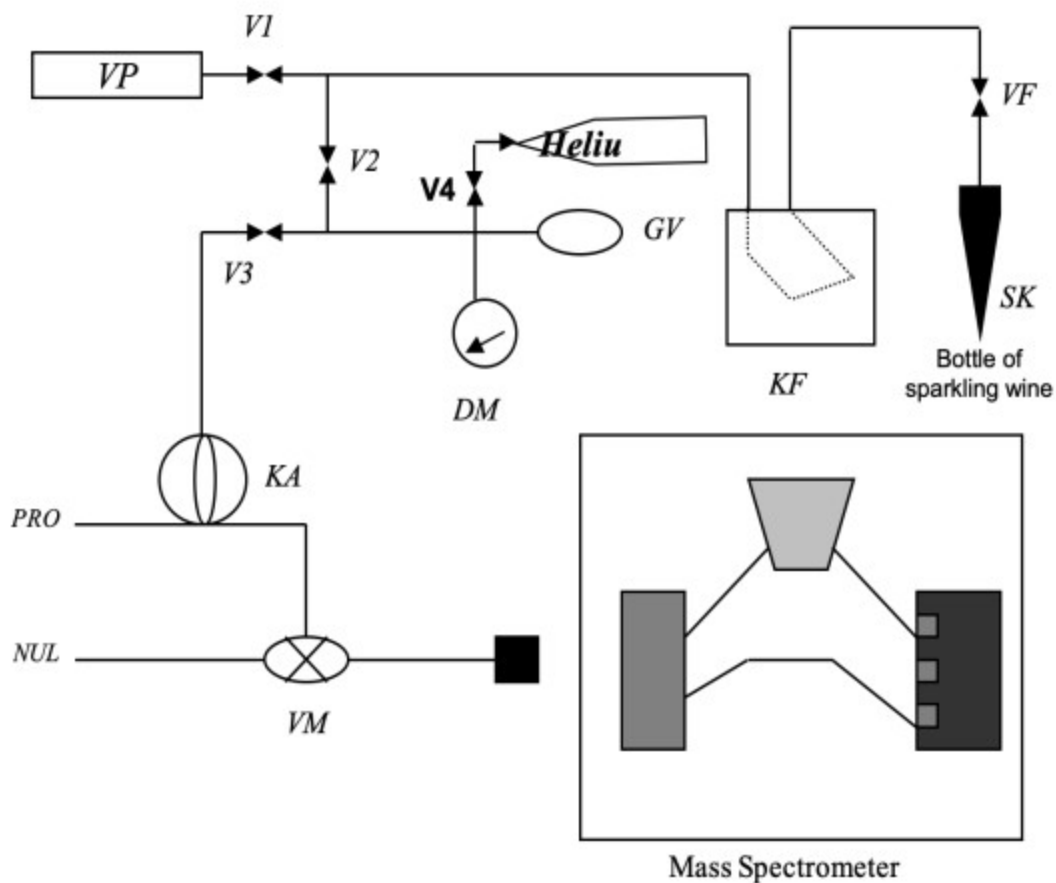

V1-V4 check valve

VP vacuum pump

VF fine adjustment valve

SK sampling device

PRO helium sample flow (50 mL/min)

NUL helium (zero) flow (60mL/min)

KF water trap propanol at  $-90^{\circ}\text{C}$

GV 250 ml gas storage vessel

DM pressure gauge

KA restrictor capillary (10cm,  $150\mu\text{m}$ )

# COMPENDIUM OF INTERNATIONAL METHODS OF WINE AND MUST ANALYSIS

## Determination of the carbon isotope ratio $^{13}\text{C}/^{12}\text{C}$ of $\text{CO}_2$ in sparkling wines (Type-II)

---

VM 2/4-way valve

### Annex C Experimental procedure based on the GC-C-IRMS technique

#### 1. Instrument characteristics

- Gas Chromatograph: GC Varian 3400
- Capillary Column: HP-INNOWax (Crosslinked Polyethylene Glycol), 30 m x 0.25 mm ID, film thickness 0.5  $\mu\text{m}$
- Combustion interface by ThermoFinnigan-MAT, with oxidation oven set at 940°C or off; reduction oven at 640°C or off
- Mass Spectrometer: DeltaPlus ThermoFinnigan-MAT.


#### 2. Procedure

##### 1. $\text{CO}_2$ sampling:

Aliquots of gas were collected through a 25cc syringe, by plugging a long iron needle through the cork.  $\text{CO}_2$  pressure filled the syringe with the headspace gas spontaneously.

Transfer the gas in already crimped vials for subsequent analysis. The vials used to store the gas are previously crimped with Teflon-silicone septum caps. To flush out the air inside – and thus the atmospheric  $\text{CO}_2$  – a second needle is plunged into the septum, to guarantee that headspace gas from wine pushes out the air in vial. See figure below.

NOTE: A bigger syringe is used, in line with vial volume, to make sure the vial is clean. In our case, a 25cc (or even bigger) syringe for a 2 ml vial.

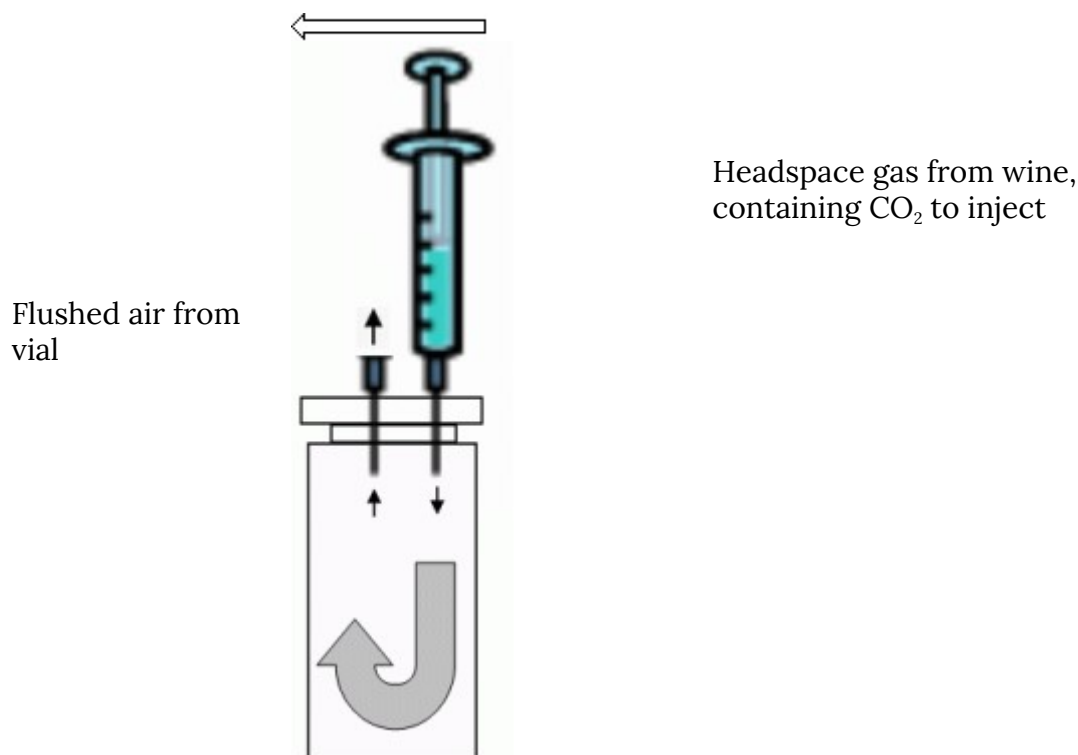


\* Note that vial is not in scale with syringe.

## 2.2. GC-IRMS analyses: $\text{CO}_2$ injection and $^{13}\text{C}/^{12}\text{C}$ ratio measurement

A very few  $\mu\text{L}$  of gas were directly injected into the column with a 10  $\mu\text{L}$  cemented-needle Hamilton syringe. Split conditions of high flow were set up. The carrier helium was at 20 PSI.

4 injections were carried out in each run for each sample. Total run time for the analysis was 6 minutes. See chromatogram below.



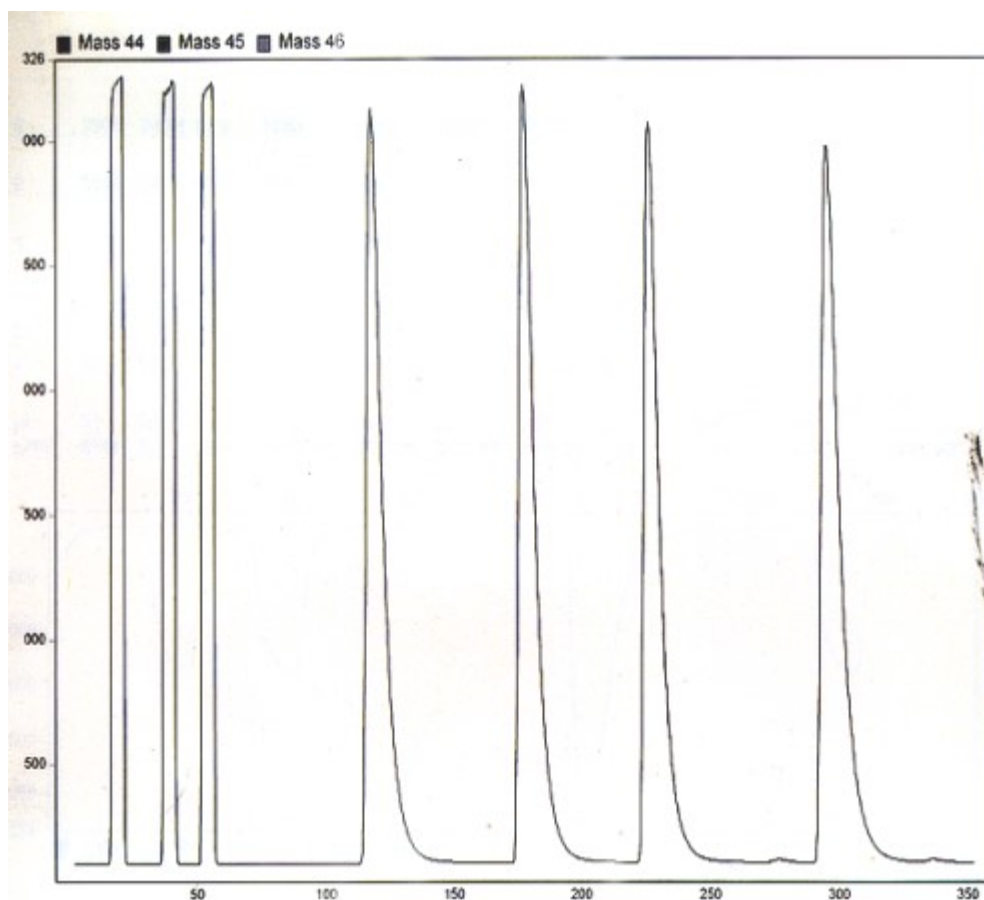

### 2.3. Processing of results

The software used to record and elaborate signals from the mass spectrometer, was version 1.50 of Isodat NT, from ThermoFinnigan-Bremen, running under MS-Windows NT OS.

For each sample, the mean  $\delta^{13}\text{C}$  value is calculated as the average value of the last 3 injections. The  $\delta^{13}\text{C}$  value of the first injection is systematically discarded.

#### Annex D(informative): Statistical results of the inter-laboratory test

In accordance with ISO 5725:1994, the following parameters were defined in an inter-laboratory test conducted by 11 European laboratories and a Mexican laboratory.

Year of the inter-laboratory test	2003-2004
Number of laboratories	12

# COMPENDIUM OF INTERNATIONAL METHODS OF WINE AND MUST ANALYSIS

## Determination of the carbon isotope ratio $^{13}\text{C}/^{12}\text{C}$ of $\text{CO}_2$ in sparkling wines (Type-II)

Number of samples

5 in blind duplicates

Parameter

$\delta^{13}\text{C}$  of  $\text{CO}_2$

Sample identification	A	B	C	D	E
Number of participating laboratories	12	12	12	12	12
Number of laboratories retained after eliminating outliers	12	11	12	12	12
Number of replicates per laboratory	2	2	2	2	2
Number of accepted test results	24	22	24	24	24
Mean ( $\delta^{13}\text{C}$ ) ‰	-9.92	-20.84	-23.66	-34.80	-36.43
$s_r^2$	0.057	0.031	0.119	0.006	0.044
Repeatability standard deviation ( $S_r$ ) ‰	0.24	0.18	0.35	0.08	0.21
Repeatability value, r ( $2.8 \times S_r$ ) ‰	0.67	0.49	0.97	0.21	0.58
$S_R^2$	0.284	0.301	0.256	0.140	0.172
Reproducibility standard deviation ( $S_R$ ) ‰	0.53	0.55	0.51	0.37	0.41
Reproducibility value, R ( $2.8 \times S_R$ ) ‰	1.49	1.54	1.42	1.05	1.16

Sample types A	Sparkling wine	$\text{C}_4$ sugar
Sample types B	Sparkling wine	$\text{C}_3$ sugar

**COMPENDIUM OF INTERNATIONAL METHODS OF WINE AND MUST ANALYSIS**  
**Determination of the carbon isotope ratio  $^{13}\text{C}/^{12}\text{C}$  of  $\text{CO}_2$  in sparkling wines (Type-II)**

r	Sparkling wine	<i>C<sub>3</sub> sugar</i>
Sample types D	Gasified wine	
Sample types E	Gasified wine	

**Annex E**

Statistical results of the inter-laboratory test on sparkling and gasified wines

Sampling procedures 7.1.d and 7.1.e

In accordance with method **OIV-MA-AS1-09: R2000**, the following parameters were defined as part of an inter-laboratory test conducted with 16 laboratories.

Year of the inter-laboratory test	2013-2014		
Number of laboratories	16		
Type of samples	Sparkling and gasified wines		
Number of samples	3, as blind duplicates		
Parameter measured	$\delta^{13}\text{C}$		
<b>INDICATORS</b>	<b>WINE NO. 1</b>	<b>WINE NO. 2</b>	<b>WINE NO. 3</b>
Number of laboratories	16	14	16
Number of repetitions	2	2	2
Minimum	-32.90	-33.10	-23.64
Maximum	-29.83	-30.97	-20.57

# COMPENDIUM OF INTERNATIONAL METHODS OF WINE AND MUST ANALYSIS


## Determination of the carbon isotope ratio $^{13}\text{C}/^{12}\text{C}$ of $\text{CO}_2$ in sparkling wines (Type-II)

Repeatability variance $s_r^2$	0.0467	0.0118	0.0648
Inter-group variance $s_L^2$	0.43853	0,29762	0.51616
Reproducibility variance $s_R^2$	0.4852	0.3094	0.5810
Overall average	-31.42	-31.83	-22.15
Repeatability standard deviation	0.22	0.11	0.25
r limit	0.612	0.307	0.720
Reproducibility standard deviation	0.70	0.56	0.76
R limit	1.971	1.574	2.157

Laboratory Code	A	B	A	B	A	B	Wine No. 1	Wine No. 2	Wine No. 3
Lab 1	-31.40	-31.69	-31.56	-31.88	-21.93	-22.12	-0.18	-0.19	0.16
Lab 2	-31.23	-31.29	-31.43	-31.41	-21.46	-22.04	0.23	-0.73	0.52
Lab 3	-32.65	-32.12	-32.15	-32.13	-23.41	-23.64	-1.39	-0.56	-1.81
Lab 4	-31.55	-31.50	-31.46	-31.66	-22.40	-22.54	-0.15	0.48	-0.42
Lab 5	-31.50	-31.30	-31.80	-31.90	-22.00	-22.30	0.03	-0.04	0.00
Lab 6	-31.46	-31.75	-31.96	-31.75	-22.39	-22.10	-0.27	-0.05	-0.13
Lab 7	-31.48	-30.66	-31.29	-29.35	-21.47	-20.57	0.50	2.71	1.48
Lab 8	-29.83	-30.17	-29.73	-31.35	-21.50	-21.96	2.04	2.31	0.55
Lab 9	-30.96	-30.90	-31.34	-31.21	-22.22	-22.27	0.70	0.99	-0.13
Lab 10	-32.34	-32.29	-32.68	-32.75	-23.25	-23.14	-1.29	-1.60	-1.37
Lab 11	-32.90	-32.70	-33.10	-33.10	-23.00	-23.50	-1.98	-2.29	-1.45
Lab 12	-31.91	-31.68	-32.22	-32.14	-22.58	-22.66	-0.54	-0.63	-0.62
Lab 13	-31.03	-31.10	-31.61	-31.68	-21.78	-21.74	0.51	0.33	0.51
Lab 14	-31.25	-30.93	-31.43	-31.54	-22.01	-22.02	0.57	0.62	0.17
Lab 15	-30.89	-30.88	-31.59	-31.47	-21.08	-21.07	0.76	0.53	1.41
Lab 16	-31.05	-30.98	-31.24	-30.97	-	-21.490	0.58	1.30	1.13
					21.090				

# COMPENDIUM OF INTERNATIONAL METHODS OF WINE AND MUST ANALYSIS

## Determination of the carbon isotope ratio $^{13}\text{C}/^{12}\text{C}$ of $\text{CO}_2$ in sparkling wines (Type-II)

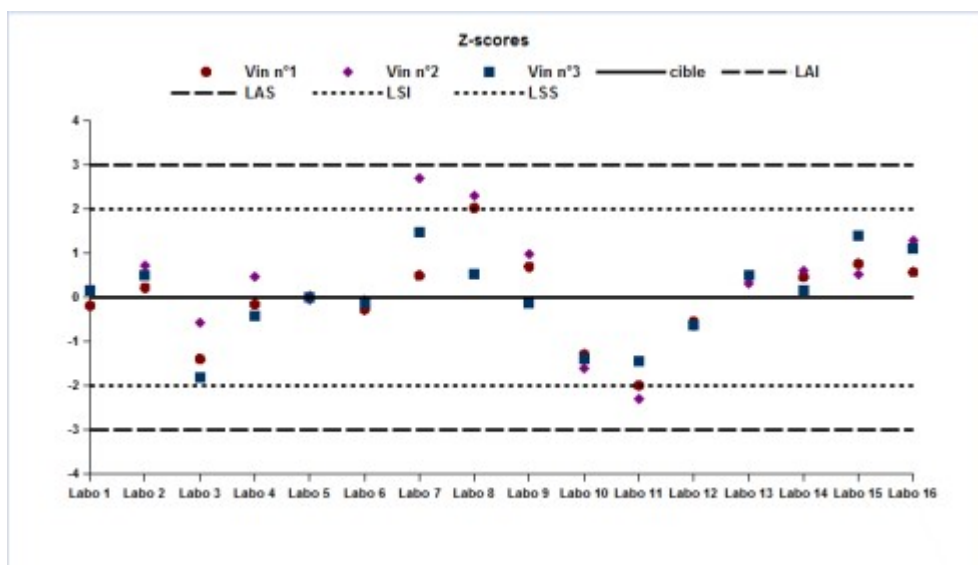

### Bibliography

- Ana I. Cabañero, Tamar San-Hipólito and Mercedes Rupérez, GasBench/isotope ratio mass spectrometry: a carbon isotope approach to detect exogenous  $\text{CO}_2$  in sparkling drinks Rapid Commun. Mass Spectrom. 2007; 21: 3323–3328.
- Laetitia Gaillard, Francois Guyon/, Marie-Hélène Salagoity, Bernard Médina, Authenticity of carbon dioxide bubbles in French ciders through multiflow-isotope ratio mass spectrometry measurements. Food Chemistry. 2013, 141: 2103-2107

Laboratory Code	A	B	A	B	A	B	Wine No. 1	Wine No. 2	Wine No. 3
Lab 1	-31.40	-31.69	-31.56	-31.88	-21.93	-22.12	-0.18	-0.19	0.16
Lab 2	-31.23	-31.29	-31.43	-31.41	-21.46	-22.04	0.23	-0.73	0.52
Lab 3	-32.65	-32.12	-32.15	-32.13	-23.41	-23.64	-1.39	-0.56	-1.81
Lab 4	-31.55	-31.50	-31.46	-31.66	-22.40	-22.54	-0.15	0.48	-0.42
Lab 5	-31.50	-31.30	-31.80	-31.90	-22.00	-22.30	0.03	-0.04	0.00
Lab 6	-31.46	-31.75	-31.96	-31.75	-22.39	-22.10	-0.27	-0.05	-0.13
Lab 7	-31.48	-30.66	-31.29	-29.35	-21.47	-20.57	0.50	2.71	1.48
Lab 8	-29.83	-30.17	-29.73	-31.35	-21.50	-21.96	2.04	2.31	0.55
Lab 9	-30.96	-30.90	-31.34	-31.21	-22.22	-22.27	0.70	0.99	-0.13
Lab 10	-32.34	-32.29	-32.68	-32.75	-23.25	-23.14	-1.29	-1.60	-1.37
Lab 11	-32.90	-32.70	-33.10	-33.10	-23.00	-23.50	-1.98	-2.29	-1.45
Lab 12	-31.91	-31.68	-32.22	-32.14	-22.58	-22.66	-0.54	-0.63	-0.62
Lab 13	-31.03	-31.10	-31.61	-31.68	-21.78	-21.74	0.51	0.33	0.51
Lab 14	-31.25	-30.93	-31.43	-31.54	-22.01	-22.02	0.57	0.62	0.17
Lab 15	-30.89	-30.88	-31.59	-31.47	-21.08	-21.07	0.76	0.53	1.41
Lab 16	-31.05	-30.98	-31.24	-30.97	-	-21.490	0.58	1.30	1.13